

# CR 35 NDT

Image Plate Scanner

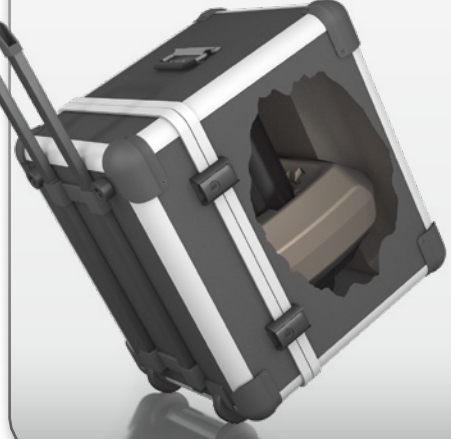


The optimal entry into CR technology



# CR 35 NDT • The optimal entry into CR technology

Technical Data	CR 35 NDT
Laser spot	50 µm
Grey level resolution	16 bit, 65.536 grey levels
Dimensions (H x W x D)	40 x 37 x 47 cm 15.8" x 14.6" x 18.5"
Weight	17,5 kg 38.6 lbs
Electrical	100 - 240 VAC / 50 - 60 Hz, < 140 W
Temperature range	10 to 35 °C 50 to 95 °F
Noise Level	< 39 dB(A)
Laser Class	I (EN 60825-1: 1994-03 + A1: 2002-07 + A2: 2001-03) + CFR 1040.10
PC-Connection	Ethernet (TCP-IP protocol), W-LAN
Display	4.3" TFT, 800 x 480 px
Storage	SDHC, max 32 GB
Software	DÜRR NDT D-Tect
IT-Requirements	For requirements refer to <a href="http://www.duerr-ndt.com">www.duerr-ndt.com</a>

### Accessories

<p><b>Transport Case</b></p> <p>Lightweight case for scanner transport.</p> 	<p><b>Battery pack</b></p> <p>Lithium-ion battery for stand-alone operation of the scanner without mains voltage.</p> 	<p><b>Image plates (IP)</b></p> <p>IPs are available in different qualities and all standard formats and, on request, in special sizes and forms.</p> 
---	---	---

DÜRR NDT GmbH & Co. KG  
Höpfigheimer Straße 22  
74321 Bietigheim-Bissingen  
Germany

[sec.duerr-ndt.com](http://sec.duerr-ndt.com)  
[info@duerr-ndt.de](mailto:info@duerr-ndt.de)