



CXYFA Series

COMFORT DURING SUMMER

Eco Friendly Refrigerant - R410A



This AC uses the latest environment-friendly refrigerant R410A that has Zero ODP (Ozone Depletion Potential) and Polyolester (POE) Oil which has better oil return properties, better heat transfer characteristics and better lubrication ability, besides being wax free.

Automatic 4D Swing


Blue Star's Automatic 4D Swing is designed with a motorised horizontal as well as vertical swing utility that ensures you enjoy uniform cooling across the room through omni-directional air blowing.



I Feel



This function enable the remote control to measure the temperature at its current location and send this signal 7 times in 2 hours to the air conditioner to enable the air conditioner to optimize the temperature around you and ensure maximum comfort. It will automatically deactivate 2 hours later.

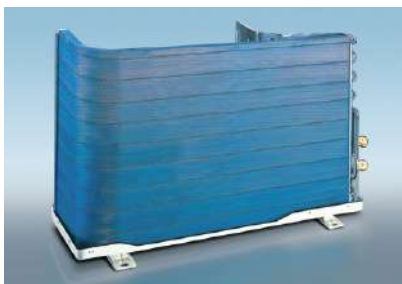

Anti Corrosive Blue Fin Copper Condenser

Specially designed Anti Corrosive Supreme Blue Coating on Copper Condenser Coils in the Blue Star air conditioner resists corrosion, improves heat exchange and enhances durability so that you can have cool, comfortable air for longer time.

OTHER FEATURES




Turbo Cooling



Mute Mode



Sleep Mode



Hydrophilic Blue Fin Evaporator



Hidden Display



Energy Saving ECO Mode



2 Way Flexi Drain Connection

CXYFA SERIES

TECHNICAL SPECIFICATION

Split AC

R410A

ROTARY

Countries	Nominal Capacity	0.75 TR	1.0 TR	1.5 TR	2.0 TR
Bhutan / Universal	Model	HW09CXYFA1-00	HW12CXYFA1-00	HW18CXYFA1-00	HW24CXYFA1-00
Sri Lanka		HW09CXYFA1-14	HW12CXYFA1-14	HW18CXYFA1-14	HW24CXYFA1-14
Nepal / Singapore Re Exports		HW09CXYFA1-06	HW12CXYFA1-06	HW18CXYFA1-06	HW24CXYFA1-06
Kenya		HW09CXYFA1-10	HW12CXYFA1-10	HW18CXYFA1-10	HW24CXYFA1-10
Indoor	Filter Configuration	White Duct Filter			
	Evaporator	Hydrophilic Blue Fin			
	Air Flow (Wet CMH) (Turbo/High/Medium/Low)	400/360/330/280/250	500/480/410/350/330	850/780/720/590/520	1100/1030/900/770/670
	Noise Level (Turbo/High/Medium/Low) in dB(A)	40/37/35/32	40/39/36/33	47/44/41/36	51/49/45/42
	Dimension (W x H x D) mm	600x232x500	777 x 250 x 205	910 x 292 x 205	1010 x 315 x 220
	Net Weight (kg)	6	8	10	13
Outdoor	Condenser	Anti Corrosive Blue Fin Copper Condenser			
	Noise Level in dB(A)	51	54	57	60
	Dimension (W x H x D) mm	600 x 232 x 500	700 x 256 x 552	760 x 256 x 552	886 x 357 x 605
	Net Weight (kg)	23	25	40	42
Tube Size	Suction Tube Size Outer Diameter inch (mm)	3/8"(φ9.52)	3/8"(φ9.52)	1/2"(φ12)	5/8"(φ15.8)
	Liquid Tube Size Outer Diameter inch (mm)	1/4"(φ6)	1/4"(φ6)	1/4"(φ6)	1/4"(φ6)
Input Power Supply		Indoor Unit	Indoor Unit	Indoor Unit	Indoor Unit

	Nominal Capacity	0.75 TR	1.0 TR	1.5 TR	2.0 TR
Performance Parameters	Voltage / Frequency / Phase	220-240 V / 50Hz / Single			
	Cooling Capacity (BTU/h)	9000	12000	18000	24000
	Cooling Capacity (Watt)	2638	3517	5275	7034
	Power Input (Watt)	850	1210	1695	2300
	EER - (BTU/h/Watt)	10.59	9.92	10.62	10.43
	COP - (Watt/Watt)	3.1	2.9	3.1	3.1

*Blue Star has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.



Authorised Distributor

For more information, please contact:

BLUE STAR INTERNATIONAL FZCO: Unit No 3E-520, Building No. 3E (East Side),
Dubai Airport Free Zone, Dubai, UAE, PO Box: 293719. Phone: +971 4 230 6900
E-mail: exports@bluestarindia.com

INDIA: BLUE STAR LIMITED: 2nd Pokhran Road, Majiwada, Thane (West) 400 601, India.
Phone: +91 22 6792 4000 Customer Care E-mail: globalexpertservice@bluestarindia.com
Visit us at: www.bluestarindia.com

August2019/ Flyer/ Unitary Products/ Room Air Conditioner