




BLUE STAR

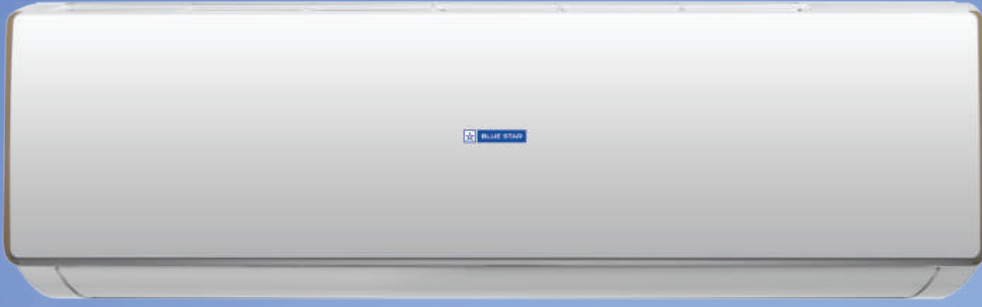

**CXYFA Series**  
Split AC

**فئة CXYFA**  
مكيف سبليت



Kingdom of Saudi Arabia المملكة العربية السعودية	Nominal Capacity	1 TR	1.5 TR	2 TR	2.5 TR	3.0 TR
	Model	HW12CXYFA3I-15	HW18CXYFA3I-15	HW24CXYFA3I-15	HW30CXYFA3I-15	HW36CXYFA3I-15
		HW12CXYFA3O-15	HW18CXYFA3O-15	HW24CXYFA3O-15	HW30CXYFA3O-15	HW36CXYFA3O-15
	Energy Efficiency Class	D	D	D	D	D
Performance Parameters قياسات الأداء	Voltage / Frequency / Phase	230 V / 60Hz / Single				
	Cooling Capacity (BTU/h) @ T3	10600	15500	18900	22200	23600
	Cooling Capacity (kW) @ T3	3.09	4.53	5.52	6.51	6.90
	Power Input (Watt) @ T3	1269	1824	2100	2552	2713
	EER - (BTU/h/Watt) @ T3	8.35	8.50	9.00	8.70	8.70
	Cooling Capacity (BTU/h) @ T1	12100	18000	21000	26800	28600
	Cooling Capacity (kW) @ T1	3.54	5.25	6.15	7.85	8.40
	Power Input (Watt) @ T1	1021	1500	1750	2161	2306
	EER - (BTU/h/Watt) @ T1	11.85	12.00	12.00	12.40	12.40
Indoor داخلي	Filter Configuration	Dust Filter				
	Evaporator	Hydrophilic Gold Fin				
	Air Flow (Wet CFH) (Turbo/High/Medium/Low)	815 / 750 / 690 / 560	1050/940/820/750	1500/1360/1230/1100	1500/1360/1230/1100	1500/1360/1230/1100
	Noise Level (Turbo/High/Medium/Low) in dB(A)	46 / 44 / 41 / 33	55 / 51 / 47 / 44	55 / 52 / 50 / 47	54 / 52 / 50 / 47	54 / 52 / 50 / 48
	Dimension (W x H x D) mm	910 x 294 x 206	1010 x 315 x 220	1186 x 340 x 258	1186 x 340 x 258	1186 x 340 x 258
	Net Weight (kg)	10	13	18	18	18
Outdoor خارجي	Condenser	Gold Fin Copper Condenser				
	Noise Level in dB(A)	54	57	58	59	59
	Dimensions (W x H x D) mm	817 x 328 x 553	920 x 380 x 699	920 x 380 x 699	953 x 433 x 808	953 x 433 x 808
	Net Weight (kg)	28	43	43	56	59
Tube Size مقاس الأنابيب	Suction Tube Size Outer Diameter (mm / inch)	Φ12(1/2")	Φ12(1/2")	Φ15.88(5/8")	Φ15.88(5/8")	Φ15.88(5/8")
	Liquid Tube Size Outer Diameter (mm / inch)	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")	Φ6(1/4")
Pipe Length طول الأنابيب	Max Distance Height (m)	10*	10*	10*	10*	10*
	Max Distance Length (m)	15	15	15	15	15
Max Ambient Operating Temperature (°C)		55	55	55	55	55
Input Power Supply		Indoor unit	Indoor unit	Outdoor unit	Outdoor unit	Outdoor unit

\*All performance data mentioned are as per SASO

\*Blue Star has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.

\* Piping Height after 5m need professional installation to keep check on oil return to compressor and additional gas charge as specified in manual.



For more information, please contact:

**BLUE STAR INTERNATIONAL FZCO:** Unit No 3E-520, Building No. 3E (East Side),  
Dubai Airport Free Zone, Dubai, UAE, PO Box: 293719. Phone: +971 4 230 6900  
E-mail: exports@bluestarindia.com

**INDIA:** BLUE STAR LIMITED: 2nd Pokhran Road, Majiwada, Thane (West) 400 601, India.  
Phone: +91 22 6792 4000 Customer Care E-mail: globalexpertservice@bluestarindia.com  
Visit us at: www.bluestarindia.com

Authorised Distributor